




SAB - Trafo, s.r.o.

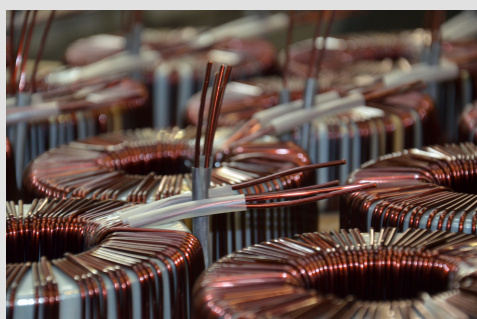

METHODS OF TOROIDAL TRANSFORMERS INSTALLATION

Method - 1

- standard transformer type supplied with an installation set consisting of metallic or plastic mounting pad and two rubber pads - on customer's request only.

Method - 2

- standard transformer type, its center is potted with polyurethane compound and there is a brass tube for screw insertion or a cup with hole.

Method - 3

- the transformer is partly or completely potted in a box with screw hole. This method enables achieving the transformer protection of up to IP 66.

Other methods

- entirely depend on customer's requirements (installation box, holder for DIN rack, etc.).

KONTAKT:

Nahořanská 414
CZ 549 01 Nové Město nad Metují,
Krčín
tel.: +420 491 472 055
email: info@sabtrafo.cz