




SAB - Trafo, s.r.o.

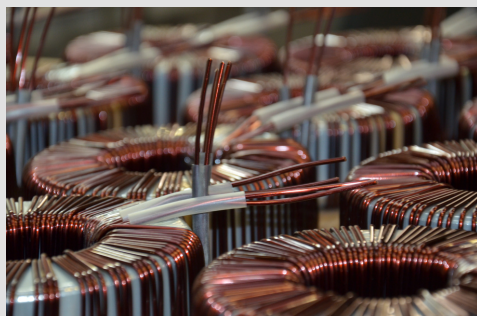

TOROIDAL AUTO-TRANSFORMERS ACCORDING TO EN 61558-2-13

Auto-transformers are produced according to EN 61558-2-13 standard and intended for various power supply applications. Toroidal core enables large variability of auto-transformer dimensions. Power range from approx. 10 VA up to 5000 VA. Auto-transformers can be protected with various protective devices according to customer's requirements. Windings leads either by stranded wires in insulating tubes or by flexible cables depending on the power and design. Auto-transformers design can be adapted for installation in various environments as agreed with the customer.

Technical parameters:

Operating voltage : usually 115 V or 230 V (up to 1000 V)

Frequency : 50 / 60 Hz

Insulation class : B

Ambient operation temperature : up to 40 °C

Type of operation : S1 permanent

Terminals : flexible cable / stranded wire in insulation tube – usually 200 mm. The length of terminals can be modified.

IP protection : IP 00 up to IP 66

KONTAKT:

Nahořanská 414

CZ 549 01 Nové Město nad Metují,

Krčín

tel.: +420 491 472 055

email: info@sabtrafo.cz