




SAB - Trafo, s.r.o.

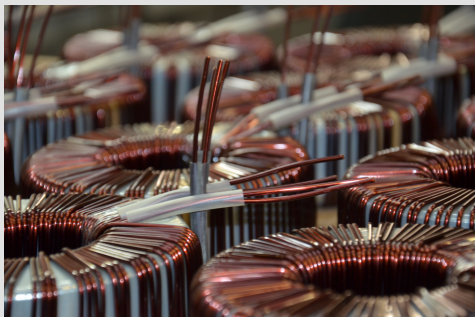

WE CAN PRODUCE SPECIALTY PRECISELY ACCORDING TO CUSTOMER'S REQUIREMENTS:

Dimensions

- large variability with regard to numerous core purchase possibilities

Design

- designs with protection from IP 00 up to IP 66 – tested and approved by a certified test facility, possibility of installation with metallic and rubber pads,
- transformer with potted center and with hole for screw, etc.

Shield winding

- a copper tape can be used to provide shielding between the primary and secondary winding or to provide external shielding for the entire transformer.

Protection

- transformer protection can be according to customer's requirements or we can design protection for the customer.

Based on your request, we can ensure production of variable toroidal transformers with isolated windings (single-phase or three-phase design) with 230 V or 400 V / 230 V nominal voltage and with nominal current of up to 160 A.

Transformers can be designed for operating cycle less than 100% if possible with regard to the application – possible minimization of dimensions.

All transformer types can be manufactured from materials compliant with the requirements of UL standard.

KONTAKT:

Nahořanská 414
CZ 549 01 Nové Město nad Metují,
Krčín
tel.: +420 491 472 055
email: info@sabtrafo.cz